
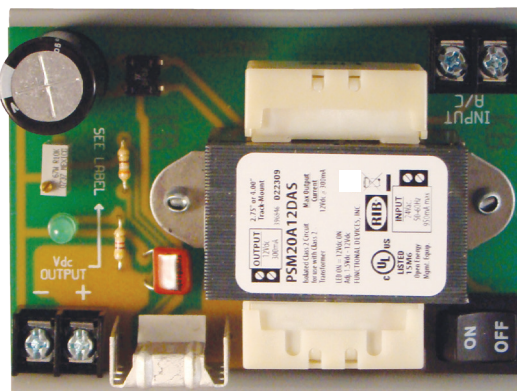


**DC POWER SUPPLY: 24 VAC TO 1.5 - 14 VDC**

**PSM20A12DAS**

4.00" & 2.75" Track Mount Isolated Linear DC Power Supply, 24 Vac to 1.5-14Vdc, 300 mA Adjustable Output

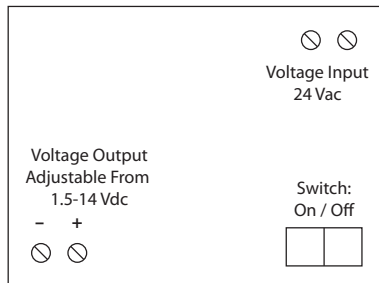

**SPECIFICATIONS**

**Voltage Input:** 24 Vac  
**Voltage Output:** 1.5 - 14 Vdc Isolated  
**Frequency:** 50/60 Hz  
**Overload Protection:** Electrical and Thermal, Auto-Reset  
**Operating Temperature:** -30 to 140° F  
**Humidity Range:** 5 to 95% (noncondensing)  
**Power Status:** LED On = Activated  
**Dimensions:** 1.625" x 2.750" x 4.000"  
**Track Mount:** 4.000" and 2.750"  
 MT212-4 Mounting Track Supplied  
**Weight:** 1.10 lbs.  
**ON/OFF Switch:** 2 Position  
**Approvals:** UL916, C-UL

**Output Current Ratings:**  
 300 mA @ 12 Vdc

**Input Current Rating:**  
 950 mA Maximum

**Percent Ripple:**  
 0.0016%, 12 Vdc @ 300 mA

**Regulation:**  
 Load: 0.04% No Load to Full Load  
 Line: 0.0080 mV/V

POWER SUPPLIES