


15 AMP TRACK MOUNT CONTROL RELAYS



RIBMNU1S

2.75" Track Mount Relay 15 Amp SPST
+ Override with 10-30 Vac/dc/120 Vac Coil

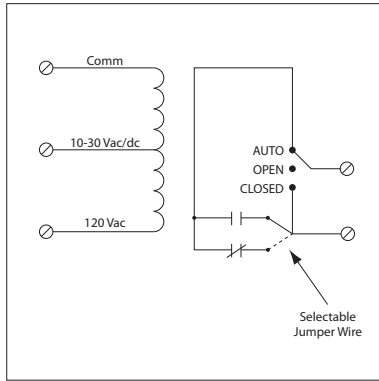

RIBMNH1S

2.75" Track Mount Relay 15 Amp SPST
+ Override with 10-30 Vac/dc/208-277 Vac Coil

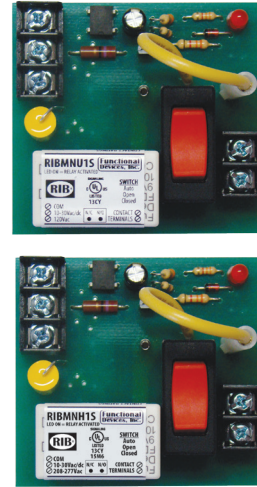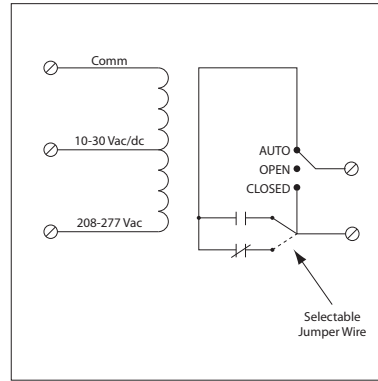

Meets "Buy American" of ARRA 2009

RELAYS

SPECIFICATIONS

- # Relays & Contact Type: One (1) SPST Continuous Duty Coil
- Expected Relay Life: 10 million cycles minimum mechanical
- Operating Temperature: -30 to 140° F
- Humidity Range: 5 to 95% (noncondensing)
- Operate Time: 20ms
- Relay Status: LED On = Activated
- Dimensions: 2.500" x 2.750" x 1.750"
- Track Mount: 2.750", See MT212 Series on page 152
MT212 Mounting Track Sold Separately
- Approvals: UL Listed, UL916, UL864, C-UL
California State Fire Marshal
- Gold Flash: Yes
- Override Switch: Yes

- Contact Ratings:**
- 15 Amp Resistive @ 150 Vac
- 10 Amp Resistive @ 277 Vac
- 480 VA Pilot Duty @ 277 Vac
- 480 VA Ballast @ 277 Vac
- Not rated for Electronic Ballast*
- 600 Watt Tungsten @ 120 Vac (N/O)
- 240 Watt Tungsten @ 120 Vac (N/C)
- 1/3 HP @ 120-240 Vac (N/O)
- 1/6 HP @ 120-240 Vac (N/C)
- 1/4 HP @ 277 Vac (N/O)
- 1/8 HP @ 277 Vac (N/C)
- Coil Voltage Input:**
- 10-30 Vac/dc ; 120 Vac ; 50-60 Hz (RIBMNU1S)
- 10-30 Vac/dc ; 208-277 Vac ; 50-60 Hz (RIBMNH1S)
- Drop Out = 2.1 Vac / 2.8 Vdc
- Pull In = 9 Vac / 10 Vdc

- Coil Current:**
- 33 mA @ 10 Vac 13 mA @ 10 Vdc
- 35 mA @ 12 Vac 15 mA @ 12 Vdc
- 46 mA @ 24 Vac 18 mA @ 24 Vdc
- 55 mA @ 30 Vac 20 mA @ 30 Vdc
- 28 mA @ 120 Vac (RIBMNU1S)
- 39 mA @ 208-277 Vac (RIBMNH1S)

- Notes:**
- Normally Open or Normally Closed selected by yellow jumper wire