


C7770, C7776, C7778 Air Temperature Sensors

SPECIFICATION DATA

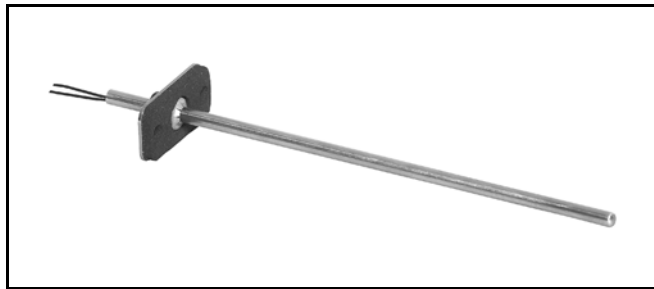

GENERAL

The C7770A, C7776A, C7778A Air Temperature Sensors are direct wired temperature sensors that are used to sense discharge or return air in a duct. The C7770A Sensors contains a temperature sensitive 20K ohm NTC nonlinearized thermistor and are compatible with the Excel 10 controller. The C7776As are 10 ohm NTC Type II sensors that are compatible with TB7600, TB7300, and TB7200 communicating thermostats. The C7778As are 10 ohm NTC Type III sensors that are compatible with WEBS-AX I/O modules.

FEATURES

- Primary and/or secondary sensor for use with electronic control systems.
- Integral 20K ohm NTC, 10K ohm NTC Type II, or 10K ohm NTC Type III nonlinear sensors
- Operating range of 45 to 99°F (7 to 37°C).
- Mounts on a flat duct or plenum surface or, for a plenum-rated application, in a standard utility conduit box.
- Probe length of 6 in. (152 mm)
- Rugged 1/4 in. diameter aluminum insertion probe.

SENSOR SELECTION

Table 1. C7770/C7776/C7778 Models

| Model | Description | Termination |
|------------|---|--------------------------|
| C7770A1006 | 6 in. duct probe, 20K ohm NTC Non-linear Temperature Sensor | 8.5 in. stranded wire |
| C7770A1040 | 6 in. duct probe, 20K ohm NTC Non-linear Temperature Sensor | 6 ft. plenum rated cable |
| C7776A1006 | 6 in. duct probe, 10K ohm NTC Type II Temperature Sensor | 8.5 in. stranded wire |
| C7776A1040 | 6 in. duct probe, 10K ohm NTC Type II Temperature Sensor | 6 ft. plenum rated cable |
| C7778A1006 | 6 in. duct probe, 10K ohm NTC Type III Temperature Sensor | 8.5 in. stranded wire |
| C7778A1040 | 6 in. duct probe, 10K ohm NTC Type III Temperature Sensor | 6 ft. plenum rated cable |



TYPICAL SENSOR RESISTANCE

Table 2. Typical Resistance of Sensor Models.

| | Typical Resistance (in ohms) | | |
|----------------|------------------------------|-----------------------------------|------------------------------------|
| | C7770 (20K Ohm NTC) | C7776 (10K Ohm NTC Type II) | C7778 (10K Ohm NTC Type III) |
| At 41°F (5°C) | 54,200 | 25,392 | 23,467 |
| At 50°F (10°C) | 41,758 | 19,901 | 18,789 |
| At 59°F (15°C) | 32,427 | 15,712 | 15,137 |
| At 68°F (20°C) | 25,370 | 12,493 | 12,268 |
| At 77°F (25°C) | 20,000 | 10,000 | 10,000 |
| At 86°F (30°C) | 15,856 | 8,057 | 8,196 |
| At 95°F (35°C) | 12,654 | 6,531 | 6,754 |

SPECIFICATIONS

Dimensions:

Probe Length (incl. mechanical strain relief): 6 in. (152 mm).

Probe Diameter: 1/4 in. (6 mm).

Flange Height: 7/8 in. (22 mm).

Flange Width: 2 in. (51 mm).

Environmental Ratings:

Operating Temperature: 45° to 99°F (7° to 37°C).

Shipping Temperature: -40° to 150°F (-40° to 65°C).

Relative Humidity: 5% to 95% noncondensing.

Vibration: V2 level.

Corrosion: Office environment.

Temperature Sensor Accuracy:

Honeywell controllers used with the C7770A, C7776A, or C7778A employ an algorithm that provides readings close to the actual temperature. Across the range of 41 to 99°F (5 to 37°C) the accuracy is better than $\pm 0.36^\circ\text{F}$ ($\pm 0.2^\circ\text{C}$).

Long-term temperature sensor drift:

(for 20K ohm sensors only)

Maximum sensor drift is nominally $\pm 0.13^\circ\text{F}$ after 5 years of operation, no appreciable drift thereafter. No calibration of the device is possible. Long term drift calibration/maintenance through controller software is typically not necessary.

Input Rating: 0.5 mA pulsed constant current.

Mounting Options:

Mounts on flat duct or plenum surface or, for a plenum-rated applications, in a standard utility conduit box.

Approvals:

NEC Class II.

CE.

By using this Honeywell literature, you agree that Honeywell will have no liability for any damages arising out of your use or modification to, the literature. You will defend and indemnify Honeywell, its affiliates and subsidiaries, from and against any liability, cost, or damages, including attorneys' fees, arising out of, or resulting from, any modification to the literature by you.

Automation and Control Solutions

Honeywell International Inc.

1985 Douglas Drive North

Golden Valley, MN 55422

customer.honeywell.com

Honeywell