

Bursting Bubbles Is A Good Thing

The unique design of the Honeywell SuperVent® Air Eliminator automatically separates and removes air from hydronic heating systems, eliminating noise and improving system efficiency. A higher-quality, more flexible replacement for other brands, the Honeywell SuperVent is easier to install and maintain. Plus, it features that famous Honeywell reliability.

Honeywell SuperVent®

More safety and comfort
for your customers.
More profits for you.



Learn More

Call toll-free 1-800-328-5111
Email info@honeywell.com
customer.honeywell.com

Automation and Control Solutions

In the US:
Honeywell
1985 Douglas Drive North
Golden Valley, MN 55422-3992

In Canada:
Honeywell Limited
35 Dynamic Drive,
Toronto, Ontario M1V 4Z9

50-9337 PR
May 2008
©2008 Honeywell International Inc. All rights reserved.

Honeywell

Honeywell SuperVent®

Honeywell




ELIMINATE AIR AND NOISE FROM
HYDRONIC HEATING SYSTEMS

Positive Change

PV Series SuperVent® Air Eliminator

The rugged design stands up to tough conditions and continuous service, providing you with leak-proof operation, reduced service intervals and the elimination of callbacks.

To learn more about adding profits with the Honeywell SuperVent®, contact your distributor, call 1-800-328-5111, email info@honeywell.com or visit customer.honeywell.com.

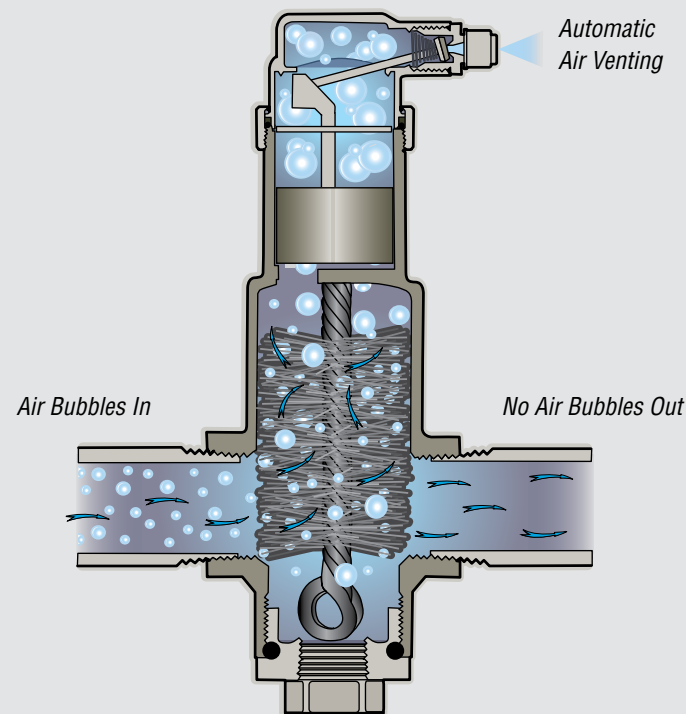

The PV Series SuperVent® eliminates air from hydronic heating systems without bleeding.

- Adjustable Vent Top Collar Ring** allows easier installation and application flexibility
- High Temperature Thermoplastic Float** controls venting rate under continuous operation
- Bronze Body** provides durable construction with no ferrous materials
- NPT and Sweat Connections Available** — see chart below for more details
- No-Clog Vent** for peace of mind — no leaking or callbacks
- Debris Baffle** to control dirt fouling and prevent failure
- Encapsulated O-Ring** for leak-proof cap seal
- Stainless Steel Concentrator** — a patented and more efficient way to eliminate air. (US Patent No. 5,490,874)
- Brass Bottom Port** for expansion tank mounting, ease of installation and maintenance

| MODEL # | SIZE | CV | CONNECTION TYPE |
|---------|--|-------|-----------------|
| PV075 | 3/4" | 13 Cv | NPT |
| PV075S | 3/4" | 13 Cv | Sweat |
| PV100 | 1" | 22 Cv | NPT |
| PV100S | 1" | 22 Cv | Sweat |
| PV125 | 1-1/4" | 38 Cv | NPT |
| PV125S | 1-1/4" | 38 Cv | Sweat |
| PV150 | 1-1/2" | 53 Cv | NPT |
| PV200 | 2" | 95 Cv | NPT |
| PVU | Universal models available for vertical risers | | |